
# **LED Mirror Front Lamp Series**

# MF-XX30A-300-3 AC 240V 28mA ±20%



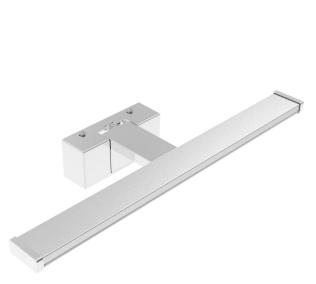

# Feature:

- No UV or IR light radiation.
- Provide 120 °beam angles.
- Easy Installation.
- Low Power Consumption: Less than 6 Watts.
- Long lifetime: 25000 hours (L<sub>70</sub>).
- Correlated Color Temperature: 2800-6500K.
- Operating temperature:  $-20^{\circ}C \sim +50^{\circ}C$ .
- LED Type:2835 LED.
- IP Class:IP44.

## **Benefits:**

Energy Cost Savings:

Over 60% Compared to Incandescent.

Solid-State: 

High-Shock & High-Vibration Resistant,

Both Electrical and Mechanical

- Eco-Friendly:
- No Mercury, No Lead Content
- No Hazardous Emissions:

No UV or IR Radiation

Constant Light Output: 

Even Lighting, Non-Halation

# **Application:**

- Mirror lighting
- Bathroom lighting
- Cabinet lighting
- Other Lighting

# **Product Specifications:**

Material	Aluminum + PC + ABS		
Input Voltage	AC240V		
Wattage	6.0W		
Operating Frequency	47-63Hz		
Operating Temperature	-20°C ∽ +50°C		
Storage Temperature	-30°C ∽ +60°C		
Net Weight per piece (g)			
Certification	CE;ROHS Compliant		
Installation Accessories	Expansion Pipes(2pcs) Screws(4pcs)		
Size(Each)	300x139x51mm		
External Wire	H03VVH2-F、2x0.75mm <sup>2</sup> White Wire End With Copper Sleeves		

# Product Selection Guide:

Product	Beam Angle	Luminous(Im)	Color Temp /Wavelength	Color	CRI
MF-W30A-300-3	120 °	480	5500-6500K	White	≥80
MF-WW30A-300-3	120 °	450	2800-3200K	Warm White	≥80


MF - XX/ 30 / A-300-3



- ① MF: Mirror Front Lamp Series
- 2 XX: W(White);WW(Warm White)
- ③ 30: 30 pcs leds
- ④ A: AC 240 V input
- (5) 300: Dimensions (300mm in length)
- 6 3: Style Number 3

**Data Sheet** 

## **Product Dimensions:**

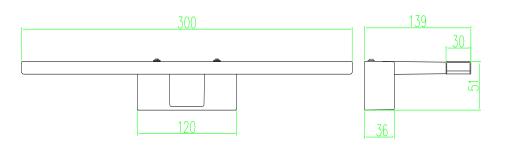

### Notes:

- 1. All dimensions unit in mm
- 2. Tolerances are ±2mm unless otherwise noted.

# Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Suitable for touch dimmer.
- There is no power supply inside the product.

#### Notes:

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.