

### Feature:



- No UV or IR light radiation.
- Provide 120° beam angles.
- Easy Installation.
- Low Power Consumption: Less than 6 Watts.
- Long lifetime: 25000 hours (L<sub>70</sub>).
- Correlated Color Temperature: 3000-6500K
- Operating temperature: -20°C~+50°C.
- AC220-240V,28mA±20%.
- LED Type:2835 LED.
- IP Class:IP44.

### Benefits:

- Energy Cost Savings:  
Over 60% Compared to Incandescent.
- Solid-State:  
High-Shock & High-Vibration Resistant,  
Both Electrical and Mechanical
- Eco-Friendly:  
No Mercury, No Lead Content
- No Hazardous Emissions:  
No UV or IR Radiation
- Constant Light Output:  
Even Lighting, Non-Halation

### Application:

- Mirror lighting
- Bathroom lighting
- Cabinet lighting
- Other Lighting

### Product Specifications:

Material	Aluminum + PMMA + ABS
Input Voltage	220-240V
Wattage	6.0W
Operating Frequency	50-60Hz
Operating Temperature	-20°C ∞ +50°C
Storage Temperature	-30°C ∞ +60°C
Net Weight per piece (g)	---
Certification	CE;ROHS Compliant
Installation Accessories	Screws (2pcs)
Size(Each)	300x109x51mm
External Wire	H03VVH2-F, 2x0.75 mm <sup>2</sup> White Wire End With Copper Sleeves

### Product Selection Guide:


Product	Beam Angle	Luminous(lm)	Color Temp /Wavelength	Color	CRI
MF-W30A-300	120°	420	3000-6500K	White	≥80

## MF - W / 30 / A-300

①                      ②                      ③                      ④                      ⑤

- ① MF: Mirror Front Lamp Series
- ② W: W(White)
- ③ 30: 30 pcs leds
- ④ A: AC220-240 V input
- ⑤ 300: Dimensions (300mm in length)

### Product Dimensions:

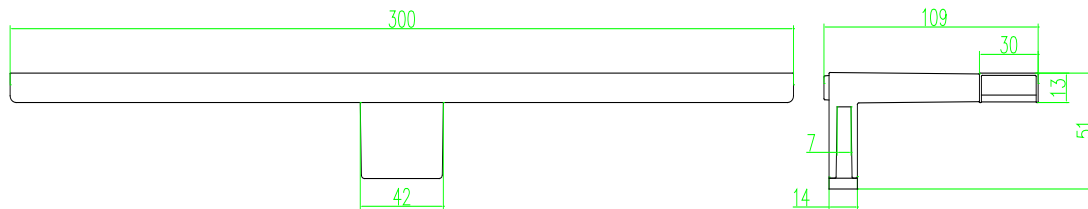

### Notes:

1. All dimensions unit in mm
2. Tolerances are  $\pm 2$ mm unless otherwise noted.

### Installation Instructions and Warnings:

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Suitable for touch dimmer.
- There is no power supply inside the product.

### Notes:

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.